

6628_AURICULARES VOUNEL


FRONT PART

6628_Auriculares Vounel Manual de instrucciones (Esp)



Recomendamos que lea detenidamente este manual de instrucciones y lo conserve para futuras consultas.

Descripción del Producto:

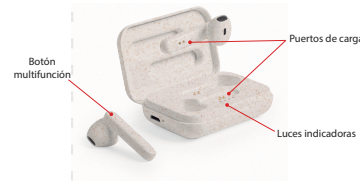

Especificaciones:

- Versión Bluetooth 5.0
- Distancia de funcionamiento: Hasta 10 metros
- Frecuencia: 60Hz-15KHz
- Auriculares: Batería de Polímero de Litio 35mAh
- Estación de carga: Batería de Polímero de Litio 400mAh
- Voltaje de carga: 5V
- Tiempo en funcionamiento: 2.5h
- Tiempo en espera: 90h
- Tiempo de carga: 2h
- SNR: 70dB
- Impedancia: 4ohms
- Distorsión: menos del 3%
- Soporta A2DP1.3/HFP1.6/HSP1.2/AVRCP1.6/DI1.3
- Cable de carga incluido

Carga:

Estación de carga

Utilice para la carga el cable suministrado. Conecte el cable USB a su ordenador/adaptador de corriente alterna y conecte el otro extremo del cable en el puerto de carga del dispositivo.

Durante el proceso de carga, el indicador luminoso en color azul empezará a parpadear. Conforme el proceso de carga se vaya completando, estos indicadores de carga se irán quedando fijos. Cuando el proceso de carga haya finalizado, el indicador LED se apagará.

Nota: Si los auriculares están en la estación de carga, estos se cargarán al mismo tiempo.

Auriculares

Introduzca los mismos en la estación de carga y el proceso se iniciará de manera automática. Los indicadores luminosos en color azul de la estación de carga se encenderán.

Cuando el proceso se vaya completando, y por tanto agotando la batería de la estación de carga, los indicadores luminosos se irán apagando, indicando el volumen de carga disponible en la unidad. Cada tramo (indicador luminoso) representa el 25% del total.

Durante el proceso de carga, el indicador luminoso en color rojo de los auriculares permanecerá encendido.

Funcionamiento:

Puede hacer uso de uno o ambos auriculares al mismo tiempo.

Nota: Al extraer los auriculares de la estación de carga se sincronizarán de forma automática. Si se encuentran apagados y fuera de la estación de carga, siga las siguientes instrucciones:

Sincronización simple

Mantenga pulsado el botón multifunción del auricular hasta que el indicador de luz azul y roja comience a parpadear. Esto indica que el dispositivo está listo para ser emparejado.

Desde el menú Bluetooth de su dispositivo móvil, busque nuevos dispositivos y seleccione "6628" para asociarlo a su teléfono. Una vez asociados correctamente, el indicador luminoso se apagará.

Sincronización doble

Mantenga pulsado el botón multifunción de ambos auriculares hasta que los indicadores de luz roja y azul del auricular izquierdo comiencen a parpadear. Escuchará un sonido de confirmación indicando que ambos dispositivos están emparejados.

El indicador luminoso del auricular izquierdo permanecerá parpadeando, mientras que el indicador del auricular derecho se apagará.

Desde el menú Bluetooth de su dispositivo móvil, busque nuevos dispositivos y seleccione "6628" para asociarlo a su teléfono. Una vez asociados correctamente, el indicador luminoso del auricular izquierdo se apagará.

Nota: Mantenga pulsado el botón multifunción de cada auricular para apagarlos.

Controles:

Responder/Colgar una llamada:

Pulse una vez el botón multifunción de cualquier auricular.

Rechazar una llamada:

Mantenga pulsado el botón multifunción de cualquier auricular.

Reproducir/Pausar la música:

Pulse una vez el botón multifunción de cualquier auricular.

Cambio de pista:

-Sincronización simple: Para pasar a la siguiente canción, pulse tres veces el botón multifunción del auricular.

-Sincronización doble: Para pasar a la siguiente canción, pulse tres veces el botón multifunción del auricular derecho. Para retroceder a la pista anterior, pulse tres veces el botón multifunción del auricular izquierdo.

Nota:

El control de volumen lo deberá realizar desde su dispositivo móvil.

Solución de problemas

Fallo	Solución
Imposible conectarse a otros dispositivos.	1. Revise si el auricular sigue en el proceso de búsqueda. Apáguelo y enciéndalo nuevamente. 2. Hay demasiados dispositivos Bluetooth alrededor que causan dificultad en la conexión. Por favor desconéctelos. 3. Asegúrese de que está en "modo asociación"
El sonido es bajo o distorsionado.	4. Revise el volumen de su dispositivo y ajústelo a un nivel adecuado. 5. Recargar la batería.
La música se detiene de vez en cuando.	6. Revise si la distancia efectiva de transmisión del auricular es excesiva o si existe algún obstáculo entre el auricular y el dispositivo Bluetooth.

Advertencias:

1. No lo exponga a la lluvia o entornos mojados.
2. Evite caídas que le puedan generar daños serios.
3. No intente reparar la unidad por sí mismo, contacte con un especialista.
4. Para evitar riesgos, no se deshaga de él de manera inapropiada ya que posee una batería de litio integrada.
5. Límpielo con un trapo seco.
6. No lo instale cerca de fuentes de calor o luz solar directa.
7. No inserte ningún objeto metálico en la unidad, existiría la posibilidad de un cortocircuito.
8. El uso de auriculares a un volumen excesivo puede causar pérdidas de audición.



El símbolo de referencia tanto en el producto como en su manual de usuario, indica que al final de la vida útil de los aparatos eléctricos y/o electrónicos, éstos deberán reciclarse por separado de sus residuos domésticos. Existen medios adecuados para recoger este tipo de material para su correcto reciclaje. Para obtener más información, póngase en contacto con la autoridad local.

Por la presente, Miko Catal Importaciones S.L. declara que este equipo radioeléctrico es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en: www.mikto.es (busque por referencia).

MIKTO CATAL IMPORTACIONES S.L. B04267225
Ctra. De Huercal-Overa, s/n, 04640, Pulpi, Almería, Spain.


BACK PART

6628_Earphones Vounel User manual (Eng)



It is recommended to read this user manual carefully and keep it for future reference.

Product overview:

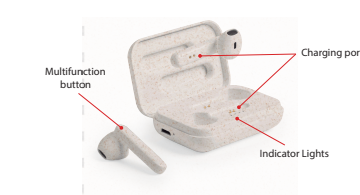

Specifications:

- Bluetooth Version 5.0
- Operating distance: Up to 10 meters
- Frequency: 60Hz-15KHz
- Earphones: Lithium polymer battery 35mAh
- Charging station: Lithium polymer battery 400mAh
- Charging voltage: 5V
- Working Time: 2.5h
- Standby Time: 90h
- Charging Time: 2h
- SNR: 70dB
- Impedance: 4ohms
- Distortion: less than 3%
- Compatible with A2DP1.3/HFP1.6/HSP1.2/AVRCP1.6/DI1.3
- Charging cable included

Charging:

Charging station

Use the cable provided for charging. Connect USB cable to computer / AC adapter and connect the other end of the cable into the charging port of the charging station.

During charging process, the blue indicator light will start to flash. As the charging process is completing the lights will appear, according to the charge level available on the unit. When the charging station is fully charged the indicator lights will turn off.

Note: if the earphones are in the charging station, both will be charge at the same time.

Earphones

Place the earphones into the charging station and the charging process will start automatically. While the charging station has power, the blue indicator light will stay on. During the charge transmission, the power of the portable charging device will decrease and the lights will start to disappear indicating the remaining charge capacity available. Every light represents 25% of the total charge.

During charging the indicator light of the earphones will turn red. When the earphones are fully charged the indicator light will turn off.

Operation:

You can use one or both earphones at the same time.

Note: When you remove the earbuds from the charging station they will synchronize automatically. If they are turned off and out of the charging station, follow the below instructions:

Simple synchronization

Hold the multifunction button to power on the earphone until the red and blue indicator light starts flashing. This indicates that the device is ready to be paired.

From the Bluetooth menu of your device, search for new devices and select "6628" to pair. Once they are paired successfully, the light indicator will turn off.

Double synchronization

Hold the multifunction button to power on both earphones until the blue and red indicator light on the left earphone starts to flash. You will hear a confirmation sound indicating both devices are paired correctly.

The indicator light on the left earphone will continue flashing and the indicator light on the right earphone will turn off.

From the Bluetooth menu of your device, search for new devices and select "6628" to pair. Once they are paired successfully, the light indicator on left earphone will turn off.

Note: Hold the multifunction button of each earphone to power off the device.

Controls:

Answer/End call:

Short press the multifunction button of any earphone.

Reject call:

Long press the multifunction button of any earphone.

Play/Pause music:

Short press the multifunction button of any earphone.

Next/previous Track:

-Simple synchronization: Press three times the multifunction button to next song.

-Double synchronization: Press three times the multifunction button of right earphone to next song. Press three times the multifunction button of left earphone to previous song.

Note:

The volume must be adjusted from your mobile device.

Troubleshooting

Fault	Solution
Unable to pair up with other devices.	1. Check whether the earphone is still on the process of search or switch it off and on again. 2. There are too many Bluetooth devices in the proximity that cause difficulty in connection. Turn off other Bluetooth devices. 3. Make sure your earphone is in "Pairing Mode".
The sound is low or distorted.	4. Check the Bluetooth device's volume and then adjust it to an appropriate level. 5. Recharge the battery.
Occasionally the music stops.	6. Check whether the earphone effective transmission range is exceeded or if there is an obstacle standing between the earphone and other Bluetooth devices.

Warnings:

1. Do not expose this product to rain or damp conditions.
2. Prevent this item from falling as it could cause serious damage.
3. Do not dismantle, repair or modify this product by yourself, contact an authorized specialist.
4. In order to avoid any risk, do not dispose of this product inappropriately or throw it into the fire as there is a built-in Lithium battery.
5. Clean it with a dry cloth.
6. Do not place this item near sources of heat or expose to direct sunlight.
7. Do not insert any metal objects into this device as there is a risk of causing a short circuit in the unit.
8. Excessive sound pressure from earphones and headphones can cause hearing loss.



This symbol both in the product and its user manual indicates that at the end of the devices electrical life, it should be recycled separately from your household waste. There are adequate means to dispose of this material for proper recycling. For more information, contact your local authorities.

Herby, Miko Catal Importaciones S.L. declares that this radio equipment is in compliance with Directive 2014/53/EU. The full text of the UE declaration of conformity is available at: www.mikto.eu (search on reference).

MIKTO CATAL IMPORTACIONES S.L. B04267225
Ctra. De Huercal-Overa, s/n, 04640, Pulpi, Almería, Spain.